



PET Packing Belt, Drawbench Production Line From <http://>

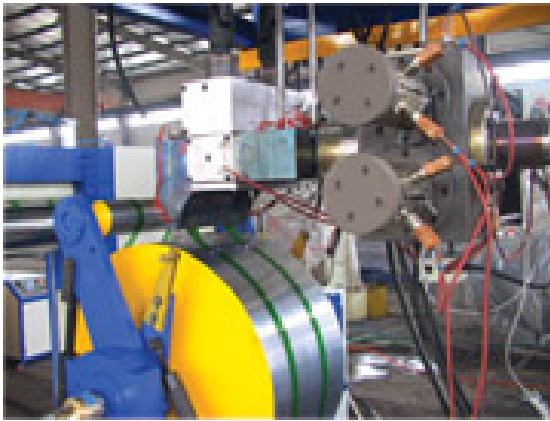

Extruded Rough Strip Casting

- Single screw or twin screw technique for option dependent requirement
- 100% recycled flakes can be used for production
- Even plasticization and stable extrusion with PC automatic full line
- The dosing pump ensures continuous and stable production
- The filter of double columns with four working positions removes impurity effectively
- Single strap or double strap for option

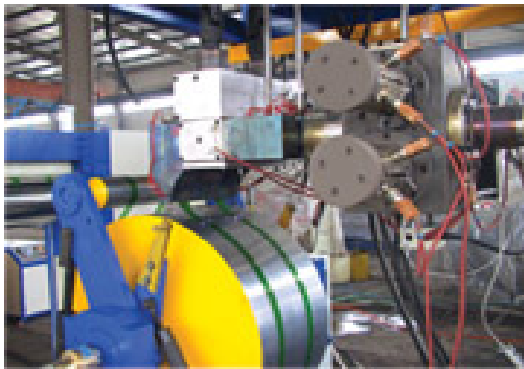

Extension & Oven

The main technique parameter

| | |
|--------------------------|----------|
| Range of band width | 6-32mm |
| Speed of production line | 120m/min |
| Stretch ratio | 4-6 |
| Max. output | 200kg/h |



Cooling & Coiling



Single Wire Coiling



Single Wire Extension

Single Wire Extrusion

